


TECHNICAL BULLETIN TB-19

Opel

Please, follow the instructions below to replace an alternator having **two terminals** (LAMP and Bat; see *picture 1*), by an replacement alternator having **only one terminal** (D+ ; see *picture 2*).


1. Disconnect battery
2. Disconnect alternator wiring
3. Remove alternator from vehicle
4. Fit the replacement alternator to the vehicle
5. Isolate the LAMP cable -normally blue and white (C)- and remove terminal from block (B)
6. Connect the LAMP terminal to the D+ terminal on the replacement alternator
7. The remaining BAT (D) cable -normally red- can be insulated and taped back. Reconnect battery output terminal (+) to alternator.

Alternator with double plug connection (D+) and (+)

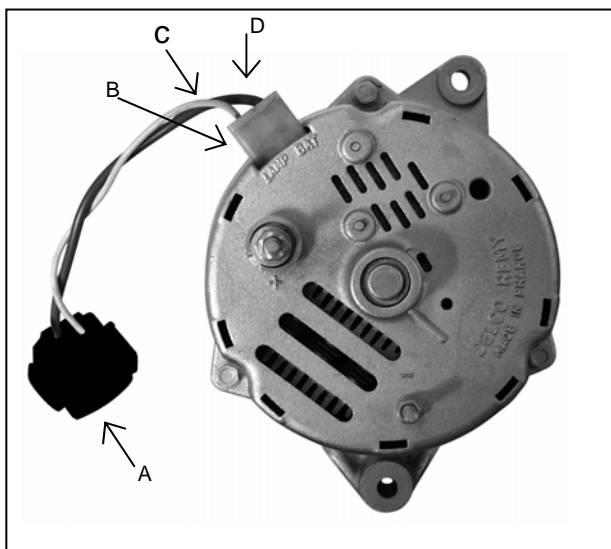

PICTURE 1

Alternator with individual plug connection (D+)

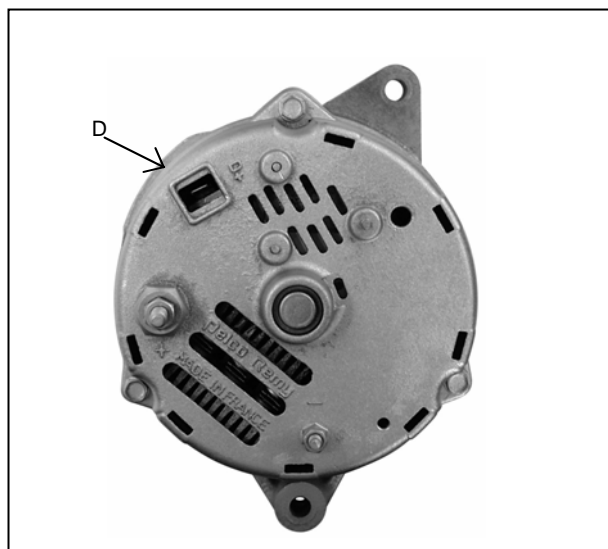

PICTURE 2